



# OPTIMA


# OPTIMA



OPTIMA	BOARD	TEGULAR	MICROLOOK	VECTOR
	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm	 Prelude XL <sup>2</sup> 24 mm Prelude Sixty <sup>2</sup>
	 15/20/25mm	 9.5mm 8mm 15/20/25mm	 4.5mm 8mm 15/20/25mm	 586mm 575mm 6mm 2mm 14mm 22mm 10mm 594mm
<b>OPTIMA 15 mm</b>				
600 x 600 x 15 mm	2327 M	2329 M	2331 M	
600 x 1200 x 15 mm	2328 M	2330 M	2332 M	
<b>OPTIMA 20 mm</b>				
600 x 600 x 20 mm	2335 M	2349 M	2363 M	
600 x 1200 x 20 mm			2364 M	
600 x 1800 x 20 mm	2337 M			
1200 x 1200 x 20 mm	2338 M	2352 M	2366 M	
<b>OPTIMA 22 mm</b>				
600 x 600 x 22 mm				2387 M
600 x 1200 x 22 mm				3413 M
<b>OPTIMA 25 mm</b>				
600 x 600 x 25 mm	2379 M	2381 M	2383 M	

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
• Board, Tegular, MicroLook 15 mm	<b>0.90</b>	0.90	0.35	0.75	1.00	0.80	0.90	0.95	$\alpha_p$
• Board, Tegular, MicroLook 20 mm	<b>0.95</b>	0.95	0.40	0.80	1.00	0.85	1.00	1.00	$\alpha_p$
• Board, Tegular, MicroLook 25 mm	<b>1.00</b>	1.00	0.50	0.85	1.00	0.95	1.00	1.00	$\alpha_p$
• Vector 22 mm	<b>1.00</b>	0.95	0.35	0.80	1.00	0.90	1.00	1.00	$\alpha_p$

**Sound Absorption Class = A**

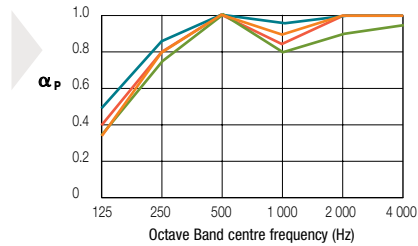

$R_w$
<b>7 dB</b> (OPTIMA 15 mm)

EEA Euroclass A2-s1, d0	RUS G1, V2, D1, T1 to FZ 123
-------------------------	------------------------------

$\lambda = 0.032$ W/m K	95 % RH
-------------------------	---------

**15 YEAR**  
guarantee

15 mm: 1.8 kg/m <sup>2</sup>
20 mm: 2.3 kg/m <sup>2</sup>
22 mm: 2.9 kg/m <sup>2</sup>
25 mm: 2.8 kg/m <sup>2</sup>

Please contact our Armstrong Technical Sales Group for further details.

[www.armstrong.eu](http://www.armstrong.eu)